


Improve Your Stone & Stucco Walls!

Seals Joints, Absorbs Movement, Minimizes Cracking Risk & Helps Dry Walls
with a Crisp, Professional-Looking Soft Joint

Flex-N-Dry™ Tape

EXPANDING FOAM TAPE SOFT JOINT SOLUTION

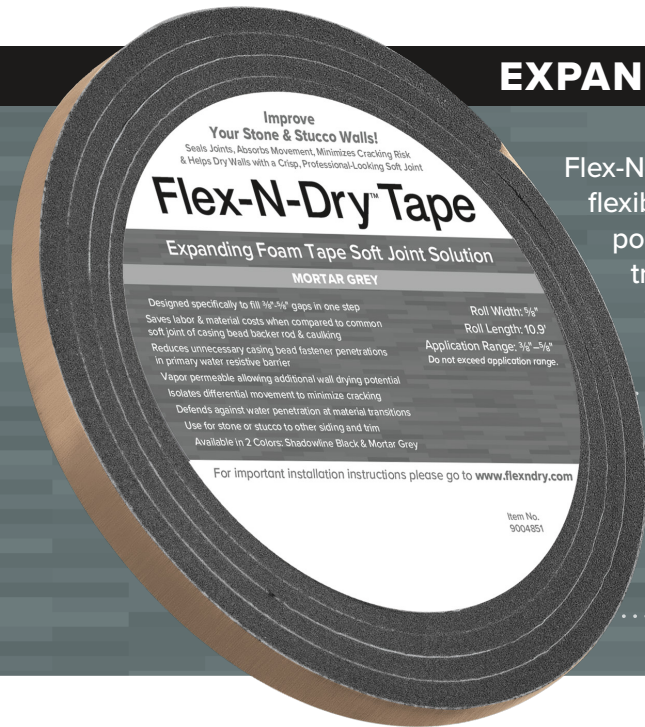

Flex-N-Dry™ Tape is a UV stable, pre-compressed, self-expanding, flexible, flame-resistant soft joint alternative. It is a high-density polyurethane foam impregnated with a modified acrylic resin and treated with a pressure-sensitive adhesive on one side for ease of installation. Flex-N-Dry Tape self-expands to fill a 3/8"–5/8" joint creating an elastic, vapor-permeable and weather-tight seal.

PRODUCT DETAIL

Roll Length: 10.9' • Tape Width: 5/8"

Application Range: 3/8"–5/8" Joint

Color Options: Shadowline Black or Mortar Grey

Why tolerate an ugly caulked joint when you can have a crisp, clean professional job with Flex-N-Dry Tape?

- Save labor & material costs while eliminating unnecessary penetrations in your flashing and primary WRB
- Flex-N-Dry Tape gives you a joint that defends against water penetration while letting moisture vapor escape helping dry walls faster
- Flex-N-Dry Tape is available in two colors compatible with most projects: Shadowline Black or Mortar Gray

Flex-N-Dry Tape can be used as an exterior or interior joint sealant as the primary or secondary seal in vertical applications. Acceptable applications include:

- Soft Joint treatment at dissimilar materials in manufactured stone or stucco applications
- Control Joints and Movement Joints in masonry and stucco façades
- Isolation joints at material transitions & terminations



Flex-N-Dry™ Tape

EXPANDING FOAM TAPE SOFT JOINT SOLUTION



FEATURES

- Vapor permeable—allowing moisture vapor to escape, helping walls dry faster
- Installs in one step faster than a standard soft joint with no casing bead, backer rod and caulk required; saving labor & material costs
- Since no casing bead is required, Flex-N-Dry Tape reduces fastener penetrations in the primary water resistive barrier reducing risk of leaks
- Provides a clean, finished look without artistic work of a caulk gun
- Adhesive on one side of tape secures it during expansion and speeds installation time
- Acts as a flexible soft joint between dissimilar materials absorbing movement and reducing risk of cracking in masonry & stucco
- Provides flexible weather defense at transitions to fiber cement, composite and vinyl siding as well as all common trim materials
- Using Flex-N-Dry Tape around windows helps meet warranty requirements to prevent masonry bind
- Permanently flexible
- Compatible with many sealants should you need to top coat it
- Can be painted with acrylic paint
- Chemically compatible with most residential & commercial construction substrates
- Requires minimal to no surface preparation; no primer is needed
- Requires no mixing or masking
- Can be applied in nearly any temperature conditions
- Clean-up with simple soap and water; no solvents are required
- Weather resistance is supported by annual laboratory testing of harsh weathering conditions since 1965
- Low volatility
- Tested to ASTM E331 at 6.27PSF for 2-hour duration
- 3-year Limited Warranty (see actual warranty for details)